

Feedback Stabilization of Flowing, Electromagnetically Restrained Liquid Metal Walls

S.M.H. Mirhoseini, F.A. Volpe

Dept Applied Physics and Applied Mathematics

Columbia University, New York, USA

Liquid metal walls offer numerous advantages

- Heat removal → higher volumetric densities of fusion power
- Increased survivability to disruption?
- Neutron attenuation → less radiation damage in structural materials → reduced need for maintenance and replacement
- Stabilizing effect of rotating walls → higher plasma β
- Reduced impurities and recycling

Liquid walls will need to flow

[Moir 1997,
Kotschenreuther 1999,
Abdou 2001,
Majeski 2003
and several others]


Different forces were proposed

To sustain the flow:

- Gravity
- Electromagnetic forces
- Magnetic propulsion
- Thermoelectric drive

For adhesion to substrate:

- Capillary forces
- Electromagnetic forces
- Centrifugal
- ...

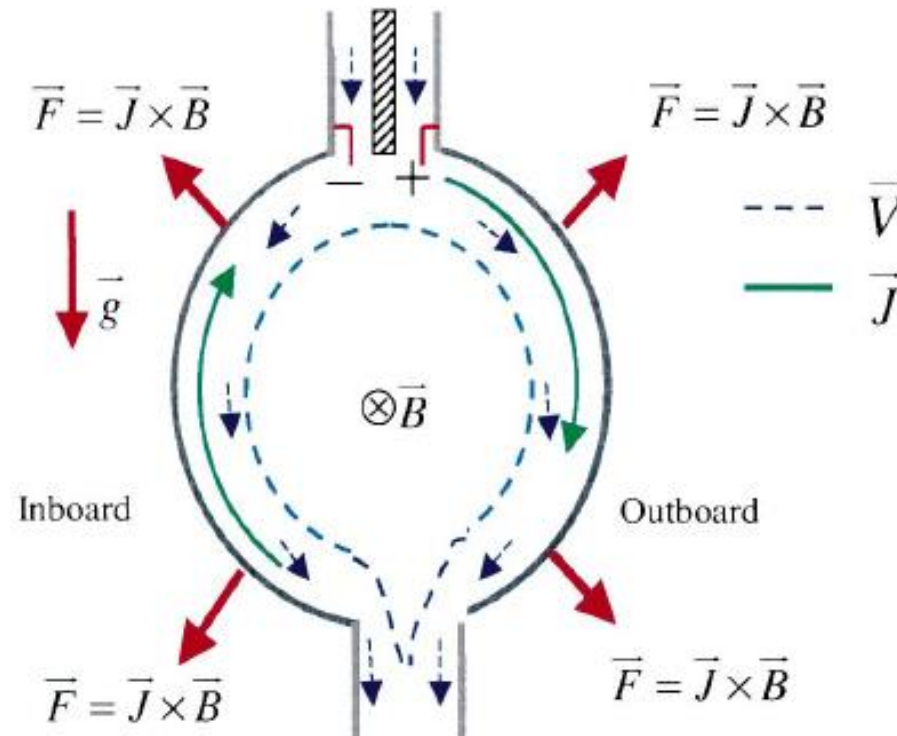



[Abdou 2001,
Zakharov 2003,
Ruzic 2011
and others]

Research need: stabilization of liquid metal flows

Free-surface liquid metal flows tend to “bulge” and interact with plasma or “deplete” and expose substrate to heat and neutrons.

Due to:



- Rayleigh-Taylor instabilities
- Non-uniform B (error fields, modes in the plasma)
- Non-uniform eddy currents
- Drag from field gradients
- Non-uniform velocity
- Turbulence

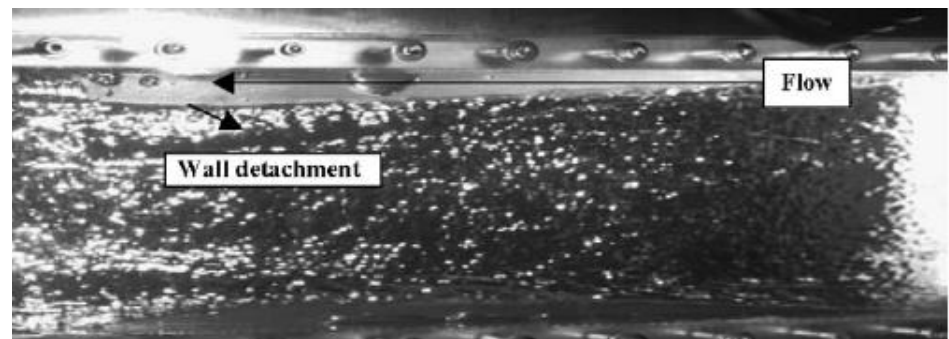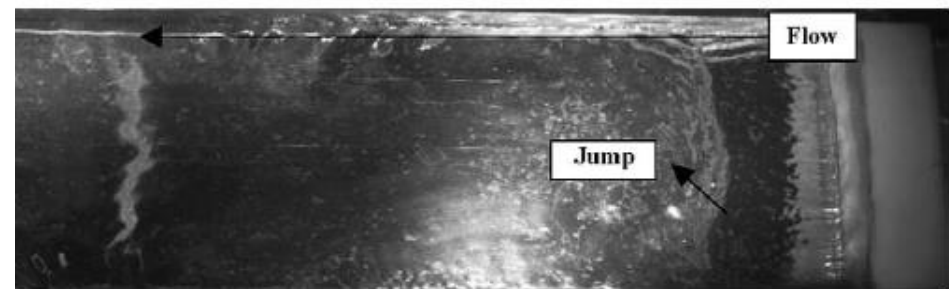

Proposed solution: feedback control by array of electrodes to ensure uniform thickness

Similar to feedback control of MHD instabilities in plasmas by means of arrays of coils:

Adjust V in electrodes \rightarrow stronger (weaker) j where Stronger (weaker) $j \times B$ needed

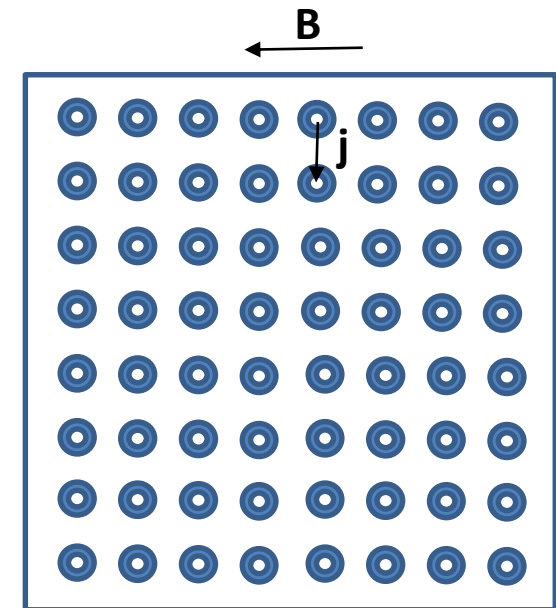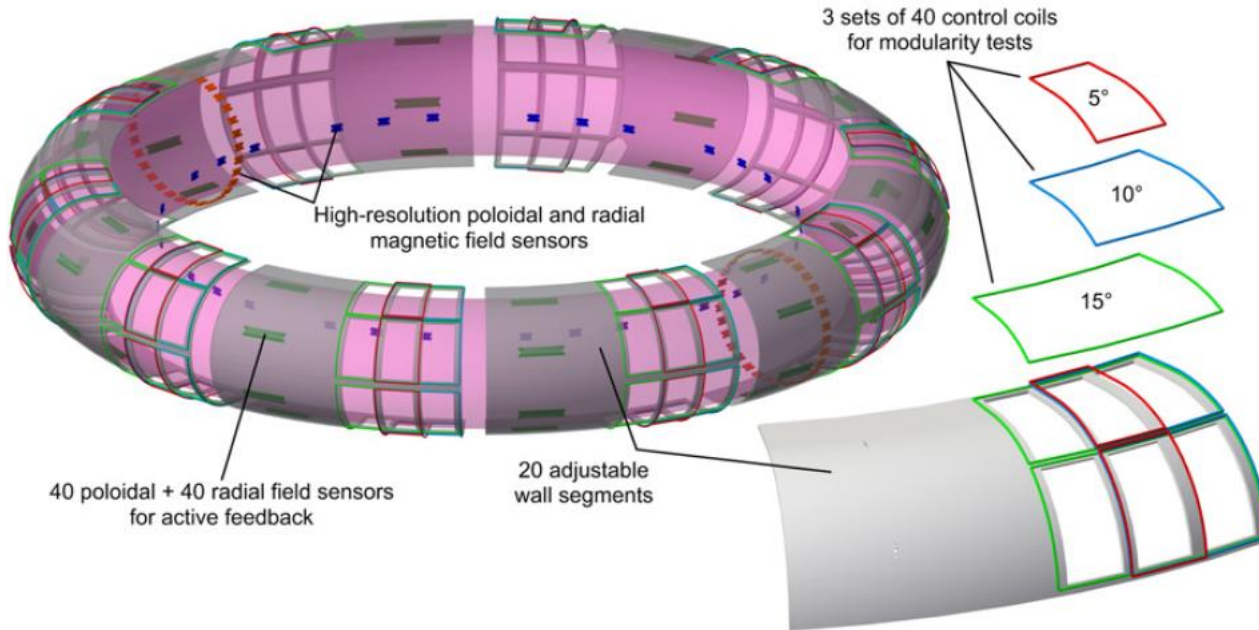

Electrodes embedded in tiles.

Sensors of local thickness: ultrasound


LIDAR

electrodes!

(resistance \rightarrow thickness)

Work begun: liquid metal, movable tile, coil

Liquid metal adopted is Galinstan (alloy of Ga, In, Sn).
Non-toxic, low reactivity.


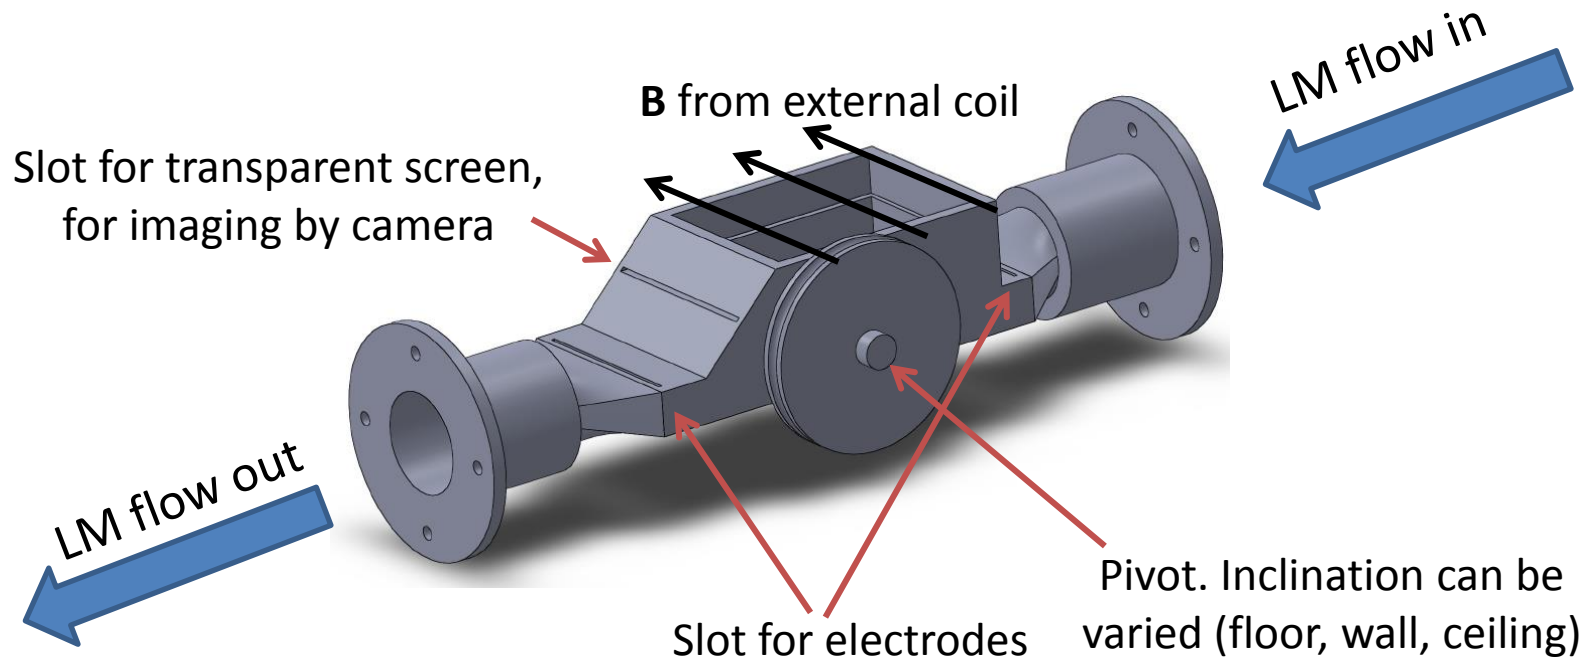


3D printed in corrosion-resistant plastic.

Coated with Teflon to reduce wetting, for diagnostic reasons.

Electromagnetic permanent magnet pump will sustain flow at 0.2-2 m/s

Ferromagnets on rotor \rightarrow rotating field, partly frozen in LM \rightarrow LM also rotates, with slip factor

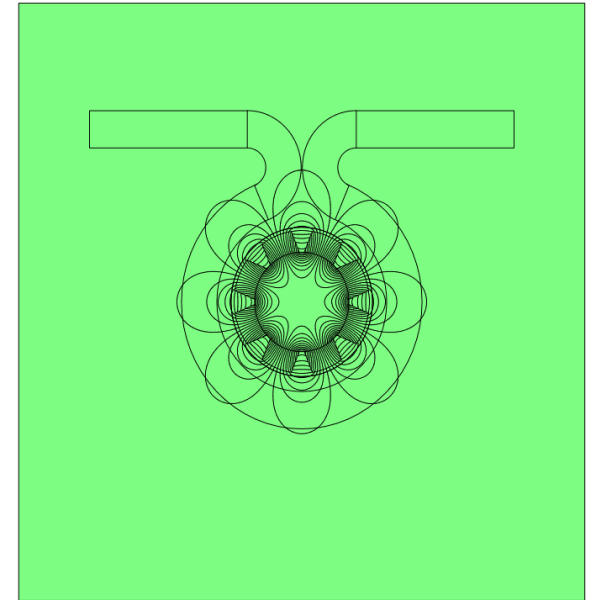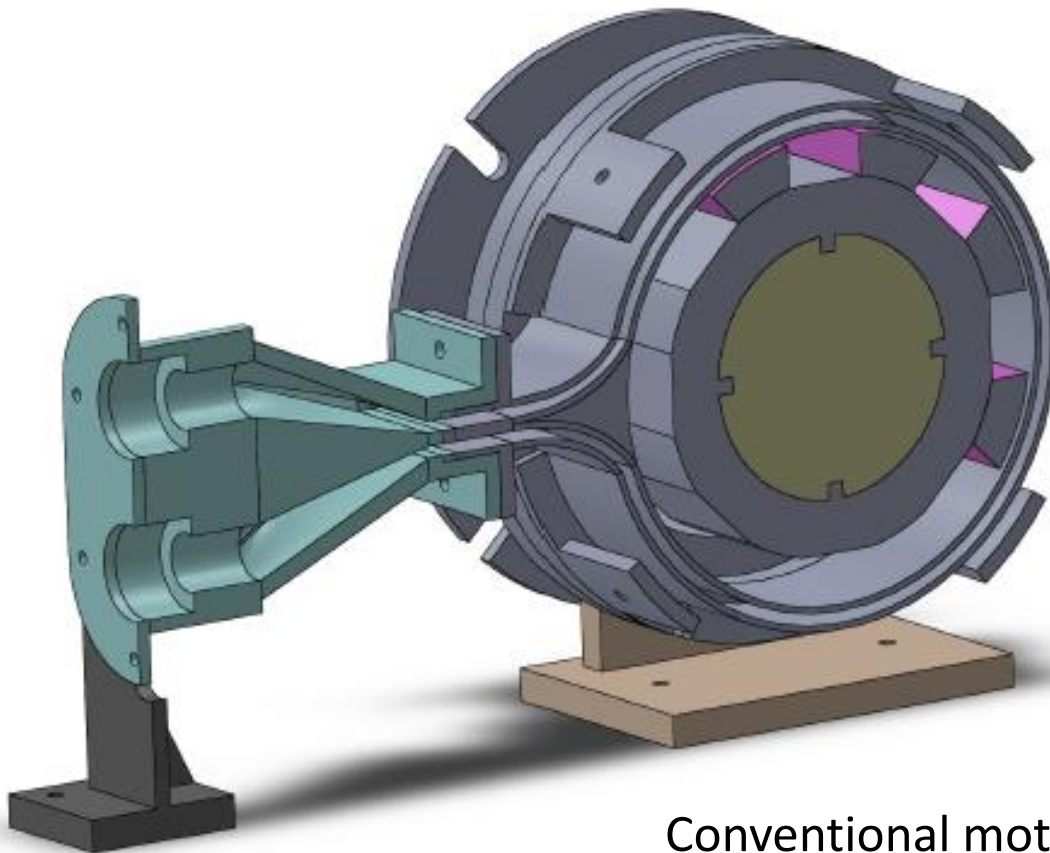

Conventional motored pumps would enter in electrical contact with LM

Summary

- Research need: stabilization of liquid metal flows
 - To prevent undue interaction with plasma
 - To prevent exposing underlying solid wall to heat and neutrons
- Possible solution: feedback control by array of electrodes, to locally adjust $j \times B$
 - Similar to f/back control of plasma instabilities by array of coils, to locally adjust B_R .
- Preliminary work started at Columbia
 - LM alloy (Galinstan), coil, hydraulic circuit, tiltable “tile” ✓
 - e.m. permanent magnet pump (in progress)